




SPF

We switch on the world safely

PSC Luminaires (Opal)



LIGHT DISTRIBUTION CURVES

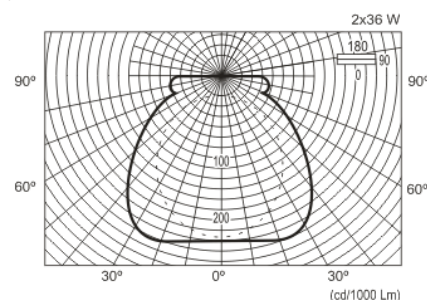

Specifications

Body: 0,70mm DKP Sheet
Diffuser: White acrylic
Base: EN 60400
Cable: 1mm² NYA
Paint: Electrostatic powder paint

Fields Of Application

Schools
 Offices
 Meeting halls
 Car Parks
 Warehouses

System and Product Certificates



120/230V 50/60



Code No	Type	Power	Lamp Type	Luminous Flux (Lm)	Current (A)	Dimensions(mm) a x b x c	Weight (Kg)	Volume (m ³)	Base
5019-111	PSC Opal	1x18W	L18	1x1300	0,37	620x70x90	0,0032	1,30	G-13
5019-112	PSC Opal	2x18W	L18	2x1300	0,43	620x125x63	0,0056	1,40	G-13
5019-116	PSC Opal	1x36W	L36	1x3250	0,43	1230x70x90	0,0099	2,20	G-13
5019-117	PSC Opal	2x36W	L36	2x3250	0,86	1230x125x63	0,0110	3,30	G-13



Email: sales@spfsa.net