





SPF

We switch on the world safely

Locked Type Batten Luminaires



LIGHT DISTRIBUTION CURVES

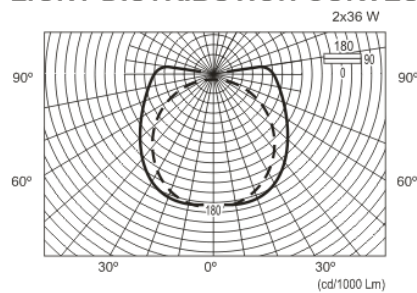

Specifications

Body: 0.50 mm DKP Sheet
Cable: 1mm² NYA
Paint: Electrostatic powder paint

Fields Of Application

Offices
 Schools
 Factories
 Business centers

System and Product Certificates



120/230V 50/60 Hz



Code No	Type	Power	Lamp Type	Luminous Flux	Current	Dimensions(mm)	Weight	Volume	Base
				(Lm)	(A)	axbxc	(Kg)	(m ³)	
5012-903	With Lock	1x18W	L18	1x1300	0,37	612x83x53	1,13	0,0027	G-13
5012-904	With Lock	2x18W	L18	2x1300	0,43	612x69x53	1,20	0,0027	G-13
5012-901	With Lock	1x15W	L15	1x650	0,33	464x83x53	0,99	0,0020	G-13
5012-906	With Lock	1x30W	L30	1x2250	0,365	920x83x53	1,33	0,0040	G-13
5012-908	With Lock	1x36W	L36	1x3250	0,43	1224x83x53	1,55	0,0045	G-13
5012-909	With Lock	2x36W	L36	2x3250	0,86	1224x69x53	2,10	0,0045	G-13
5012-910	With Lock	1x58W	L58	1x5000	0,67	1523x83x53	2,20	0,0067	G-13
5012-911	With Lock	2x58W	L58	2x5000	1,34	1523x69x53	3,20	0,0067	G-13



Email: sales@spfsa.net