





# SPF

*We switch on the world safely*

## Locked Type Batten Lum.with Ref.

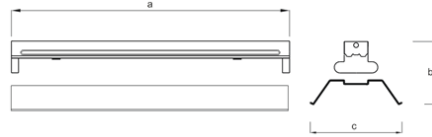

### LIGHT DISTRIBUTION CURVES

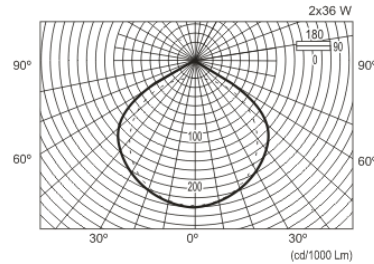

### Specifications

**Body:** 0.50 mm DKP Sheet  
**Reflector:** Electrostatic powder painted DKP sheet  
**Cable:** 1mm<sup>2</sup> NYA  
**Paint:** Electrostatic powder paint

### Fields Of Application

Offices  
 Schools  
 Factories  
 Business centers

### System and Product Certificates



120/230V 50/60 Hz



Code No	Type	Power	Lamp Type	Luminous Flux	Current	Dimensions(mm)	Weight	Volume	Base
				(Lm)	(A)	axbxc	(Kg)	(m <sup>3</sup> )	
5012-933	Locked Ref.	1x18W	L18	1x1300	0,37	612x95x210	1,90	0,0027	G-13
5012-934	Locked Ref.	2x18W	L18	2x1300	0,43	612x95x210	1,90	0,0027	G-13
5012-931	Locked Ref.	1x15W	L15	1x650	0,33	464x95x210	1,57	0,0020	G-13
5012-935	Locked Ref.	1x30W	L30	1x2250	0,365	920x95x210	2,46	0,0040	G-13
5012-937	Locked Ref.	1x36W	L36	1x3250	0,43	1224x95x210	3,00	0,0045	G-13
5012-938	Locked Ref.	2x36W	L36	2x3250	0,86	1224x95x210	3,60	0,0045	G-13
5012-939	Locked Ref.	1x58W	L58	1x5000	0,67	1523x95x210	4,10	0,0067	G-13
5012-940	Locked Ref.	2x58W	L58	2x5000	1,34	1523x95x210	5,00	0,0067	G-13



Email: sales@spfsa.net