



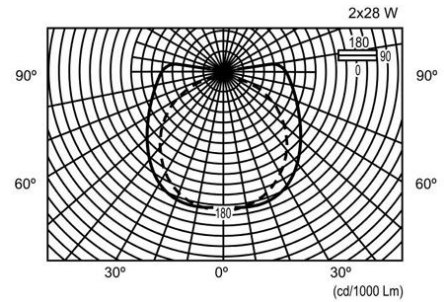

SPF

We switch on the world safely

T5 Luminaires With Reflecto

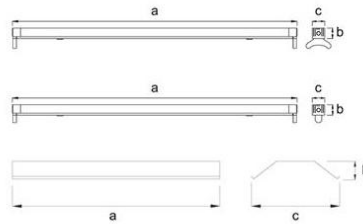

Specifications

Body : 0,50 mm sheet
Reflector : Electrostatic powder coated sheet
Cable : 1 mm NYA
Coating : Electrostatic powder coating

Fields Of Application

Offices
 Schools
 Factories
 Business centers

System and Product Certificates



120/230V 50/60 Hz



Code No	Type	Lamp Type	Power	Luminous Flux	Current	Capacitor	Dimensions(mm)	Weight	Volume	Base	PCS/Pack
			W	Lm	A	$\mu\text{F}\pm 10\ 250\ \text{V}$	axbxc	Kg	m^3		
5012-153	TMS T5	TL5 14	1x14	1x1220	0,090		574x62x37	4,00	0,00487	G5	6
5012-154	TMS T5	TL5 14	2x14	2x1220	0,160		574x64x37	4,20	0,00487	G5	6
5012-168	TMS T5	TL5 28	1x28	1x2580	0,150		1174x62x37	6,00	0,01000	G5	6
5012-169	TMS T5	TL5 28	2x28	2x2580	0,280		1174x64x37	6,20	0,01000	G5	6
5012-155	TMS T5	TL5 35	1x35	1x3450	0,180		1474x62x37	7,00	0,01260	G5	6
5012-156	TMS T5	TL5 35	2x35	2x3450	0,340		1474x64x37	7,00	0,01260	G5	6



Email: sales@spfsa.net