





# SPF

*We switch on the world safely*

## Narrow Type Batten Lum. with F

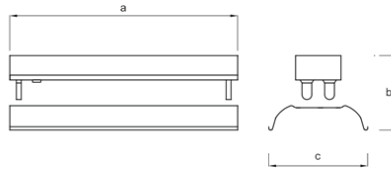

### LIGHT DISTRIBUTION CURVES

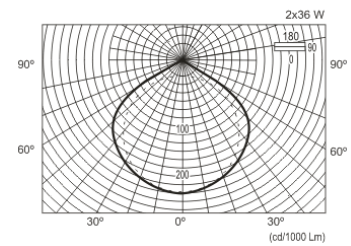

Specifications	Fields Of Application
----------------	-----------------------

<p><b>Body:</b> 0.50mm DKP Sheet  <b>Reflector:</b> Electrostatic powder painted DKP sheet  <b>Base:</b> EN 60400  <b>Cable:</b> 1mm<sup>2</sup> NYA  <b>Paint:</b> Electrostatic powder paint</p>	<p>Offices            Schools            Factories            Business centers</p>
--	--

### System and Product Certificates



120/230V 50/60 Hz



Code No	Type	Power	Lamp Type	Current	Luminous Flux	Dimensions(mm)	Volume	Weight	Base
				(A)	(Lm)	axbxc	(m <sup>3</sup> )	(Kg)	
5015-121	Narrow Batten R.	1x18 W	L 18	0,37	1x1300	630x80x200	0,0116	1,800	G-13
5015-122	Narrow Batten R.	2x18 W	L 18	0,43	2x1300	630x80x200	0,0116	1,800	G-13
5015-123	Narrow Batten R.	1x36 W	L 36	0,43	1x3250	1240x80x200	0,0230	2,750	G-13
5015-124	Narrow Batten R.	2x36 W	L 36	0,86	2x3250	1240x80x200	0,0230	3,300	G-13
5015-125	Narrow Batten R.	3x36 W	L 36	1,29	3x3250	1260x80x270	0,0315	5,300	G-13



Email:sales@spfsa.net