





SPF

We switch on the world safely

Fiberglass Lum. with IP65 Lh.



LIGHT DISTRIBUTION CURVES

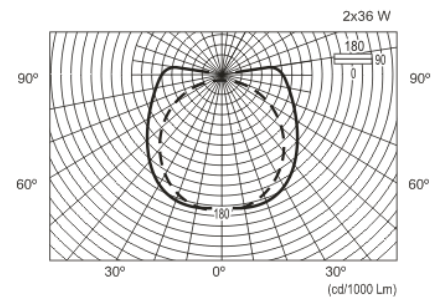

Specifications

Body: 30% glass reinforced fiberglass
Base: IP 65 EN 60400
Cable: 1mm² NYA
Gasket: Silicone

Fields Of Application

Offices
 Schools
 Industrial plants

System and Product Certificates



120/230V 50/60



Code No	Type	Power	Lamp Type	Current	Luminous Flux	Dimensions(mm)	Volume	Weight	Base
				(A)	(Lm)	axbxc	(m ³)	(Kg)	
5024-102	E.D. Fib. Bant	1x36 W	L 36	0,43	1x3250	1270x130x68	0,0132	2,20	G-13
5024-103	E.D. Fib. Bant	2x36 W	L 36	0,86	2x3250	1270x130x68	0,0132	2,75	G-13
5024-510	E.D. Fib. Bant	1x58 W	L 58	0,67	1x5000	1560x130x68	0,0162	2,75	G-13
5024-520	E.D. Fib. Bant	2x58 W	L 58	1,34	2x5000	1560x130x68	0,0162	3,85	G-13



Email: sales@spfsa.net